Part No.	(6)Length	Part No.	(6)Length
3182B−1	1M	3182B−5	5M
3182B−2	2M	3182B−10	10M
3182B−3	3M	3182B−15	15M

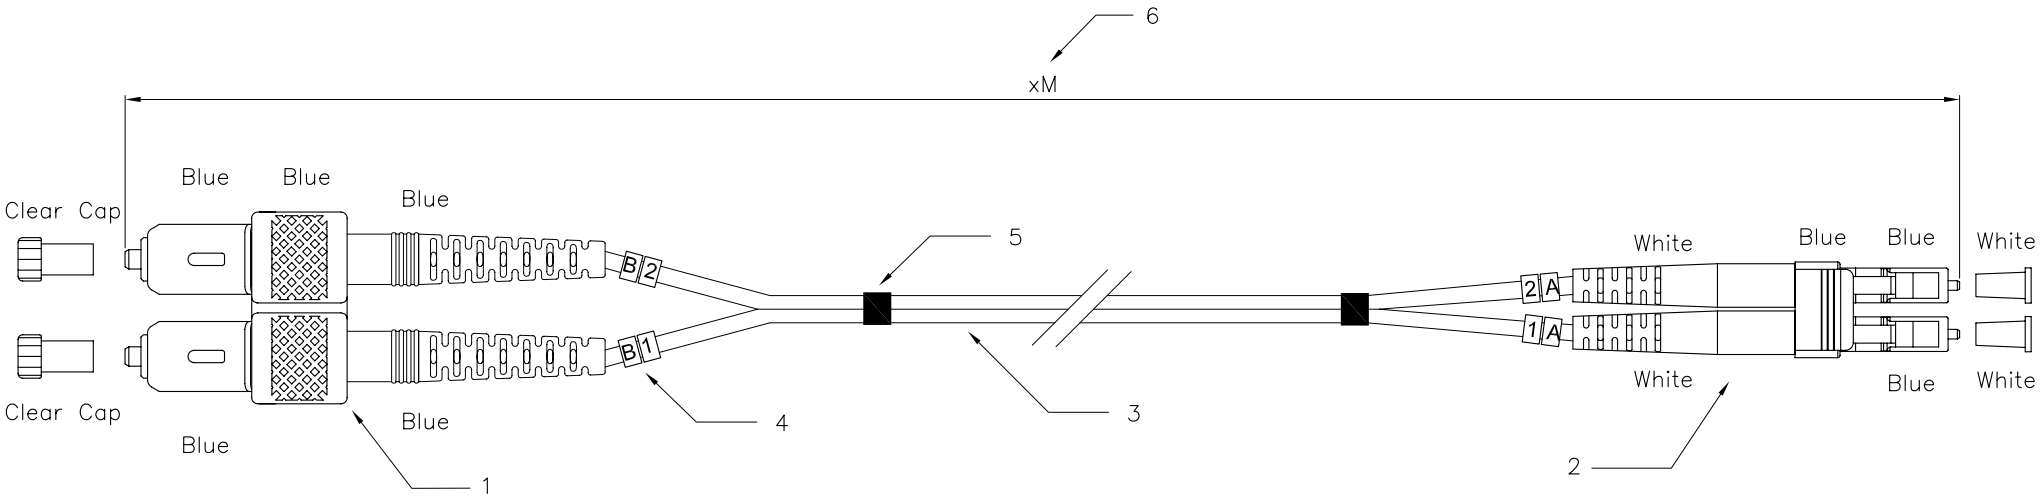

Specification:

1. Connector Type : Ⅱ SC/PC Multimode
2. Connector Type : LC/PC Multimode
3. Cable Type :
   3−1 Zipcord cable, ø3.0mm, 9/125um Multimode
   3−2 Calbe Jacket : Yellow colors, LSZH material
4. Cable Marker
5. Shrink Tube
6. Length : xM

Performance:

a. Insertion Loss : <0.3 dB
b. Return Loss : >40 dB
c. Fiber Extention : −0.05um < H < +0.05um
d. Ferrule End−face Radius : 7 < R < 25mm
e. Apex Offset : < 50um
f. Increase in insertion loss after 500 mating : 0.2 dB Max.
g. Operation Temperature : −20° to +70°
h. Storage Temperature : −40° to +80°

RoHS Compliant

UNIT M/M	DSGN	CSQ	31.MAY.2007	ITEM NO: 3182B
SCALE 1/1	CHK	Maer	31.MAY.2007	SC to LC Duplex patch cord
DWG NO: 3182B	APPR	Yty	31.MAY.2007	Videk Ltd